



High resolution scan image



Friendly operation keyboard
(Touch screen is optional)



SE-SPX5030C X Ray Baggage Scanner

Certificates: ISO19001, ISO14001, OHSMS18001, CE, Health Inspection Report, Computer Software Copyright Registration Certificate, Software Product Registration Certificate, Certificate from Ministry of Public Security, Safety and Police Electronic Products Quality Inspection Center

Product description

High Light:

- Windows 7 operation system;
- With independent industrial computer;
- Professional multi-function operation keyboard;
- Automatic save scanned image;
- Reliable performance;
- Friendly Image processing interface

Operating Environment:

- Operation temperature/Humidity: - 3°C ~ +40°C
±2°C / 5% ~ 95% (non-condensing)
- Storage Temperature/Humidity: -43°C ~ +60°C
±2°C / 5% ~ 95% (non-condensing)
- Operation Power: 220VAC(±10%)50±3Hz
(Optional: 100VAC,110VAC,120VAC,200VAC)
- Consumption: 0.4KvA
- Noise: <55db
- Dimensions (L×W×H) :132cm * 86cm * 140cm
- G.Weight: 260Kg
- Packing Volume: 1.6CBM

X-ray Generator:

- Anode Voltage: 100kv
- Anode power: 0mA
- Generate angle: 80 degree downward
- Brand: Kv-TEC, Beijing, China
- Generate direct: from bottom to top
- Cooling / Duty Cycle: Oil Cooling /100%

Technical characteristics:

- Dual energy penetration system;
- New radiation protection technology;
- TIP program;
- Clear and distinct image;
- Scanned imaged can zoom up to 32 times
- Integrated structure design, refinement appearance

Computer Character:


- CASE: X64
- Power: 300W
- Main board: Intel ITX-M100_618 VER:1.1
- CPU: Intel(R) Celeron(R) 1037U @ 1.80GHz
- Storage: 2GB Samsung DDR3L 1600MHz CE
- Video Card: Intel Ivy Bridge Graphics Controller, 64 MB
- Hard Disk: 500G Hitachi HGST
- Computer system: Windows 7 SP1 (DirectX 11)

Other Characters:

- Detect PCB board: DT
- Extension Rollers: customize size length
- Support card reader operator access
- CD DVR/RW unit: Optional
- Computer system: Windows 7 operation system
- Monitor: 17 inch monitor

Application field:

- Entertainment venues, tourist attractions, office buildings, shopping malls, factories, etc;
- Suitable for security inspection of briefcase, hand luggage, postal parcels and other small package.

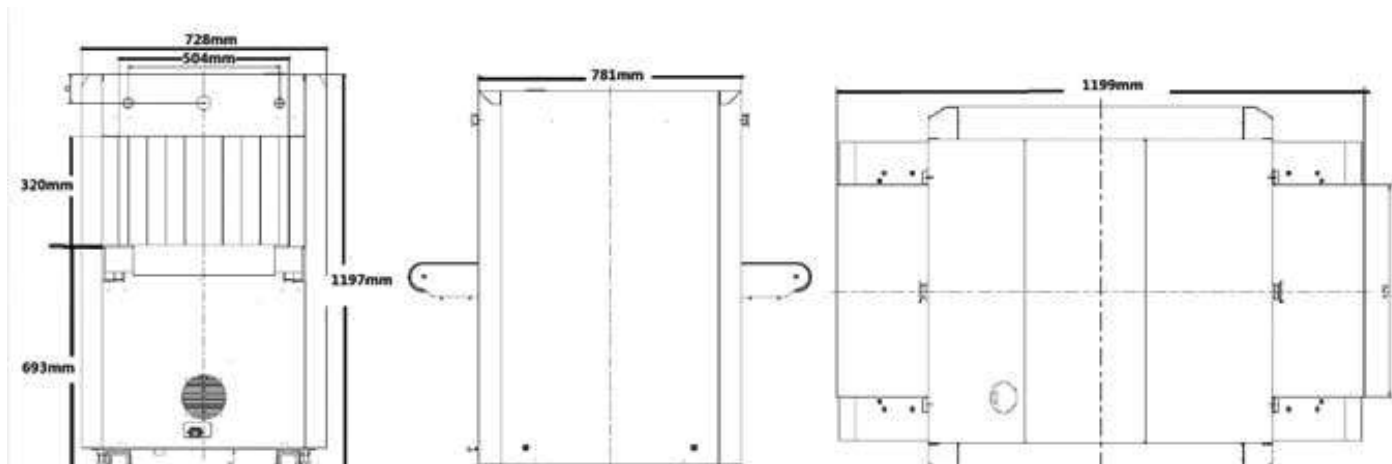

Tunnel size	:	504*320mm (w*h)
Conveyor speed	:	0.20m/s
Conveyor height	:	693mm
Max Load	:	100kgs
Wire Resolution	:	38AWG
Spatial resolution	:	vertical : diameter 1.0mm, horizontal : diameter 1.0mm
Penetration	:	14-16mm steel panel
Monitor	:	17inch, resolution 1280*1024
X Ray generator anode voltage	:	100KV
Cooling/operation cycle	:	Oil Cooling /100%
X ray Dose per inspection	:	<0.16 μ Sv
Image processing	:	Pseudo color/black&white image, Negative Image, High Penetration, Super-enhancement, histogram equalization, check back/forward, Automatic save image
Zoom	:	Variable zoom up to X32, support continuous magnification.
Image Checking	:	Continuous check back image
Storage capacity	:	Can store more than 100000 image
Dose per inspection	:	<0.125 μ Sv
Radiation leakage	:	<0.4 μ Sv/h (5cm away from fame) in full compliance with all international radiation safety requirements.
Film safety	:	In accordance with ASA/ISO1600 film safe standard
System function	:	F programmable key, high density alarm, TIP ; date/time display, baggage Count, User management, System work timing, Radiation timing, self-inspection while power on, save and search image, automatically maintenance and diagnosis system, image recognition training.
Optional function	:	Video surveillance system, LED prompt screen, bi-direction scan, voltage stabilizer, UPS back up
Frame size	:	1,199*728*1,197mm (L*W*H)

บริษัท ดอลตี โซลูชั่น จำกัด
 111/47 ม. 3 ซ.ท่าอัฐ ถ.รัตนวิเศษร์ ต.บางรักน้อย
 อ.เมืองนนทบุรี จ.นนทบุรี 11000



02-105-4034



@DgateTurnStile

www.turnstilecenter.com

Line : @dgate