

Auto Slide Door

ประตูเลื่อนอัตโนมัติ



ATD-SD400



BRUSHLESS DC MOTOR
120W BRUSHLESS DC MOTOR




DURABLE HANGERS



MICRO-CONTROLLER
Intelligence operator provides 8 functions of door's motions.

Product Description

- Applying the PCL(Programmable Logic Controller microcomputer digital chips(RAM, ROM, CPU) to memory ,detect and modify the data of door working, receive and transit the data to whole parts of the electronic components in order to control the door's working.
- Equipped with the remote control system, this is can control the door open, close ,one-way open, normally open and lock more conveniently at 100m distance.

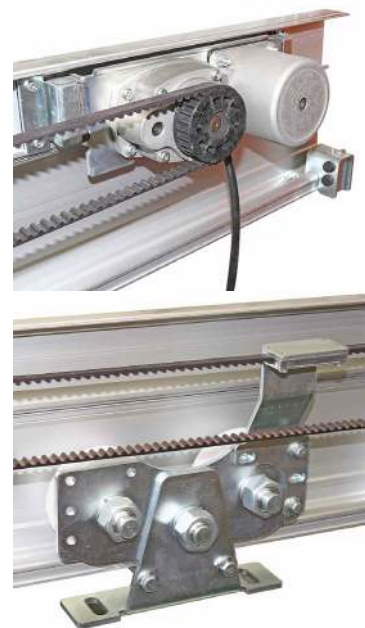

TYPE	SD400	
Model	Single-Winged	Bi-Parting
Door Weight	500kgX1(door)	400kgX2(door)
Door Width	DW=500mm~6000mm	DW=500mm~6000mm
Install Way	Surface install	Surface install
Motor	DC24V 120W Brushless DC Motor	
Control	Standard Micro-Controller	
Power Consumption	120W	
Voltage	AC100V-240V	
Environmental Temperature	-20°C~+50°C	
Volume	60decibe(max.)	
Starting Speed	600mm/(second)	550mmX2/(second)
Starting Times	0-20 sec. (regulable)	
Transmission Important Condition	RACK BELT S8M	
OPENING DOOR RANGE	0-20 sec. (regulable)	
PFC Power Efficiency	0.95(in AC100V Full load)	
Traction force	When power off the door can be opened by manual	

