


TE-TLTC02 ไฟจราจร นับถอยหลังแบบกลม Traffic light Countdown Timer

Traffic Countdown Timers are used in conjunction with Traffic Control System to provide information to the Vehicles regarding the amount of time remaining to stop/start a signal and information regarding balance time to pedestrians to cross the signal

Picture and wire connetion:




WARNING/ AVERTISSEMENT
Risk of electric shock. Disconnect before servicing or installing product.

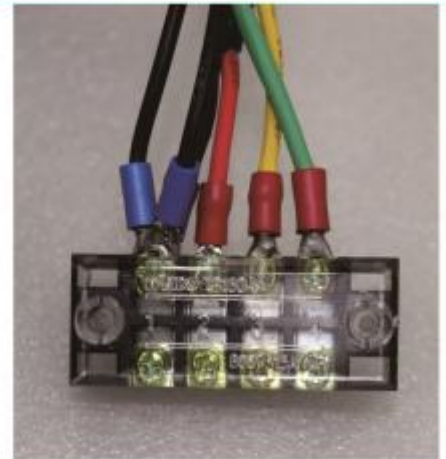

Wire instruction

1. Black line - common zero line
2. Red line - Red light live line
3. Yellow line - yellow live line
4. Red wire with green shell - green light with live wire


Simulation:

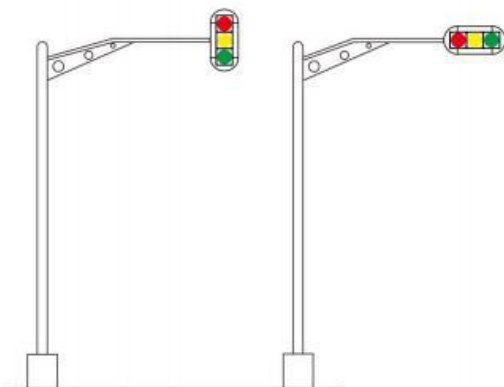

Vertical installation Horizontal installation


Features:

- Wide view angle
- Long lifespan
- One failure led will not affect whole light
- Light will enter Learning type when controller Turn on, signal cycle changed or controller is transferred from automic control to manual control.

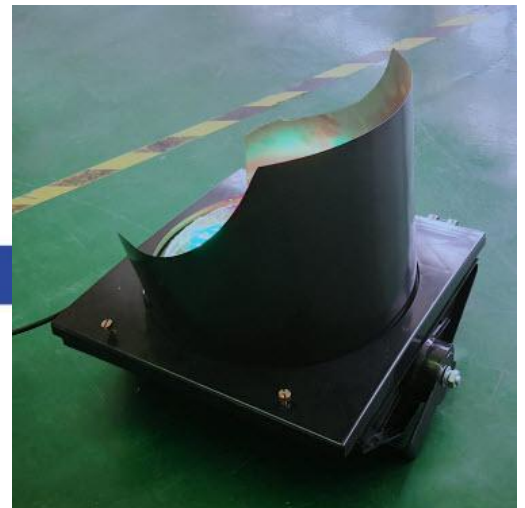

Technical data:

Size: 300mm
 Dimension: 350*350*110MM
 LED Qty: each color 112 pieces each color
 Intensity: red >5000 mcd/m² green >8000 mcd/m²
 Wave Length: red 625 ± 5 green 505 ± 5
 Power consumption: <5W
 Working voltage: DC 12V/24V, AC 85-265V
 Working temperature: -40°C ~ +80°C
 Housing Material: PC

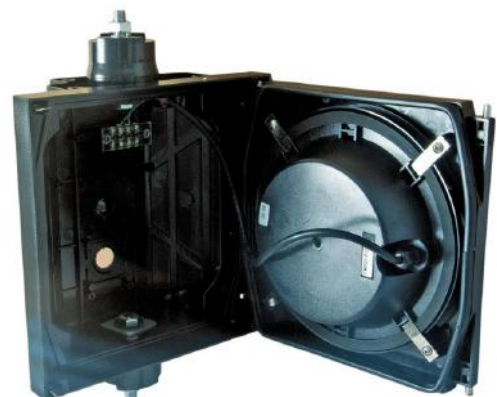

Features

- 2 digits , 2 colors (red and green)
- Working modes: Self-learning Type
- Low power consumption : High Efficiency and brightness
- Support vertical installation or horizontal installation

Product size & instal information

