

CP-LPR-TG205:LPR Camera

Entrance & Exit Product

2 MP

CMOS

ANPR

IR

VF

Relays

**Low
Illumination**



Introduction

CP-LPR-TG205 series camera, based on deep learning, consists of protective cover, lens, camera, LED, and power supply. It offers HD progressive scan CMOS, and integrates intelligent recognition algorithms for specific applications such as entrance management, road safety enforcement, in-vehicle monitoring, parking lot control, etc.

Key Feature

- 1/2.8" progressive scan CMOS.
- Up to 1920 × 1200 resolution with real-time video.
- 2 built-in high-performance IR and white light switchable LEDs to satisfy requirements of different scenarios.
- 2.8 to 12 mm motorized vari-focal lens to recognize 2.5 to 15 m range.
- Supports relay output to control barrier gate.
- Supports multiple trigger modes, such as video detection, I/O coil, radar mixed traffic, etc.
- Supports multi-frame LPR.
- Supports dirty license plate recognition.
- Supports quick pass of multiple vehicles.
- Supports vehicle type, vehicle color, and vehicle brand recognition.
- Integrated lights and TF card (up to 128 GB).
- Supports up to 30,000 vehicles in whitelist and blacklist totally.
- Even when the camera is offline, the built-in whitelist can control the barrier gate to open.
- When the license plates of vehicles in the blacklist are recognized, the barrier gate will not open.
- PoE (802.3af).
- One-touch focus.
- Manual capture and ANPR.
- The boom pole of the barrier gate can keep rising in vehicle queue scenario to solve the congestion.
- High capture rate of larger than 99.5% when the vehicle speed is within 60 km/h (included).

Typical Application

Multi-Frame LPR




Multi-Frame LPR

VS



One-Frame LPR

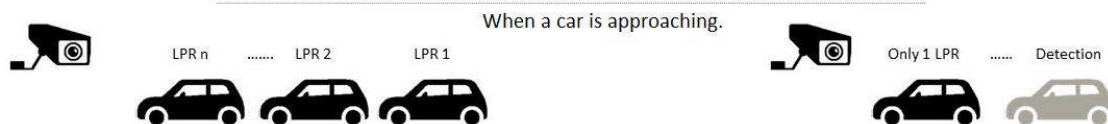

Comparison to guarantee the best result.

- High Accuracy



Quick Pass of Multiple Cars



Free-flow

VS



Stop & Go, one by one



- More efficient and Lower the risk of car damage




Specification

Model		CP-LPR-TG205
Camera	Image Sensor	1/2.8" Progressive Scan CMOS
	Min. Illumination	Color: 0.002 Lux@(F1.5, AGC ON) B/W: 0.0002 Lux@(F1.5, AGC ON)
	Shutter Speed	1/30 s to 1/100,000 s
	Lens	2.8 mm to 12 mm
	Auto Iris	DC drive
	IR Cut Filter	Supported
Compression Standard	Video Compression	H.265, H.264, MJPEG
	Vieo Bit Rate	32 Kbps to 16 Mbps
Image	Image Format	JPEG
	Max. Resolution	1920 × 1200
	Frame Rate	25 fps (P)/30 fps (N)
	Image Settings	Saturation: 0 to 100 Brightness: 0 to 100 Contrast: 0 to 100 Gain: 0 to 100 3D DNR: Off, Normal, and Expert modes are selectable. White balance: White Balance 1 and White Balance 2 are selectable.
Capture	Picture Format	JPEG with configurable quality
	Smart Recognition	ANPR, vehicle type recognition, vehicle brand recognition, vehicle color recognition
	Supplement Light Control	Auto light control/time control
	Whitelist and Blacklist	Up to 30,000 vehicles in whitelist and blacklist totally Note: Only when the TF card is available, can the func on take effect.
Network	Storage	SD/SDHC
	Protocol	TCP/IP, HTTP, DHCP, DNS, RTP, RTSP, NTP, FTP picture upload
	Security	Heartbeat, password protection, NTP
Interface	Communication Interface	1 RJ45 10M/100M/1000M adaptive Ethernet interface
	Serial Port	1 RS-485 serial port, 1 RS-232 serial port
	Built-in LED Light	2 built-in LED lights, IR and white light switchable
	Audio Input	1-ch
	Audio Output	1-ch
	Triggered Input	3-ch triggered inputs, including 1-ch I/O triggered input and 2-ch alarm inputs
	Relay Output	2-ch relay outputs, supporting rising/falling/stopping of barrier gate boom pole
	Memory Card Slot	1 TF card slot, up to 128 GB
General	Working Temperature	-30 °C to 70 °C (-22 °F to 158 °F)
	Working Humidity	90% or less (non-condensing)
	Power Supply	100 to 240 VAC/12 V PoE
	Power Consumption	Max. 22 W

	Protection Level	IP67, IK10
Vehicle Recognition	Vehicle Type	Car (including SUV, MPV, Pickup)/truck/bus/van
	Vehicle Color	Red, yellow (including orange), green, blue, purple, brown, white, grey (including silvery), black
	Vehicle Brand	Hyundai, Toyota, Kia, Honda, Volkswagen, Benz, Nissan, Ford, ISUZU, BMW, Chevrolet, Mitsubishi, Renault, Opel, Suzuki, Skoda, Daewoo, Audi, Mazda, Hino, Peugeot, Ssang Yong, Citroen, Fiat, Scania, MAN, Volvo, Lexus, Seat, Land Rover, Daihatsu, UD Trucks, Subaru, IVECO, MINI, Jeep, Porsche, Chery, Dodge, Chrysler, Acura, Alfa Romeo, Great Wall, Infiniti, Smart, SAIC Maxus, JAC, Jaguar, GMC, Lincoln, JMC, SAAB, FAW, Yutong, Mercury, Joylong, Geely, Cadillac, Jinbei, Ankai, Haima, Foton, King Long, Dongfeng, Emgrand
	ANPR Supported Country/Region	Mid-East: United Arab Emirates(Abu Dhabi, Ajman, Dubai, Fujairah, Ras Al Khaimah, Sharjah and Umm Al Quwain), Qatar, Iran, Iraq, Egypt, Jordan, Kuwait, Saudi Arabia, Pakistan, Oman, Lebanon, Bahrain Africa: Nigeria, Kenya, Cote d'Ivoire, South Africa, Tanzania, Mauritius, Morocco, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Senegal, Algeria Asia-Pacific: Australia, New Zealand, Indonesia, Malaysia, Singapore, South Korea, Thailand, Vietnam, Philippines, Hong Kong, Macao, Taiwan, Burma, India, Mongolia, Cambodia, Laos, Bangladesh America: United States of America, Canada, Argentina, Chile, Paraguay, Uruguay, El Salvador, Bolivia, Colombia, Brazil, Ecuador, Peru, Mexico, Panama, Costa Rica, Trinidad and Tobago, Dominican, Guatemala Europe: Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, Britain, Ireland, Germany, Italy, Austria, Israel, Palestine, Belgium, Luxembourg, Albania, Kosovo Russian-Speaking Regions: Azerbaijan, Belarus, Kazakhstan, Lithuania, Georgia, Estonia, Latvia, Russian Federation, Ukraine, Moldova, Uzbekistan, Kyrgyzstan, Armenia
	ANPR Accuracy (Under recommended installation and lighting conditions)	Capture rate > 99.5% Vehicle moving direction recognition accuracy > 96% Mistaken capture rate < 2% (entrance/exit)
		LPR accuracy > 99.5% Country/Region recognition accuracy > 98% (only applied to European and Russian-speaking regions)



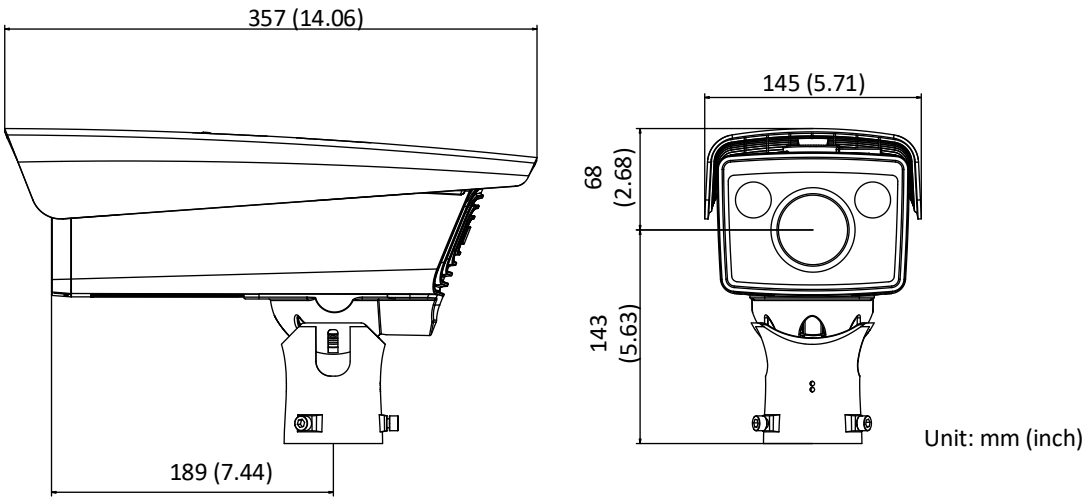



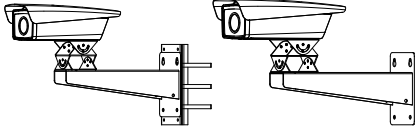

Dimension



Available Model

CP-LPR-TG205 (12 V/PoE), CP-LPR-TG205 (220 V)

Accessory

DS-1275ZJ/HWB Hoop Mount	DS-1701ZJ/HWB Wall Mount	Cardan Joint	Wall Mount
			
			

L1300-R117 Pole Mount	L2500-X1300-R117 Pole Mount
