


Face Recognition Temperature Measurement Alarm Thermal Imaging System

- ★ Face Recognition
- ★ High-resolution Thermal Imaging Temperature Calibration



Are you still using a temperature measuring device without a data platform?

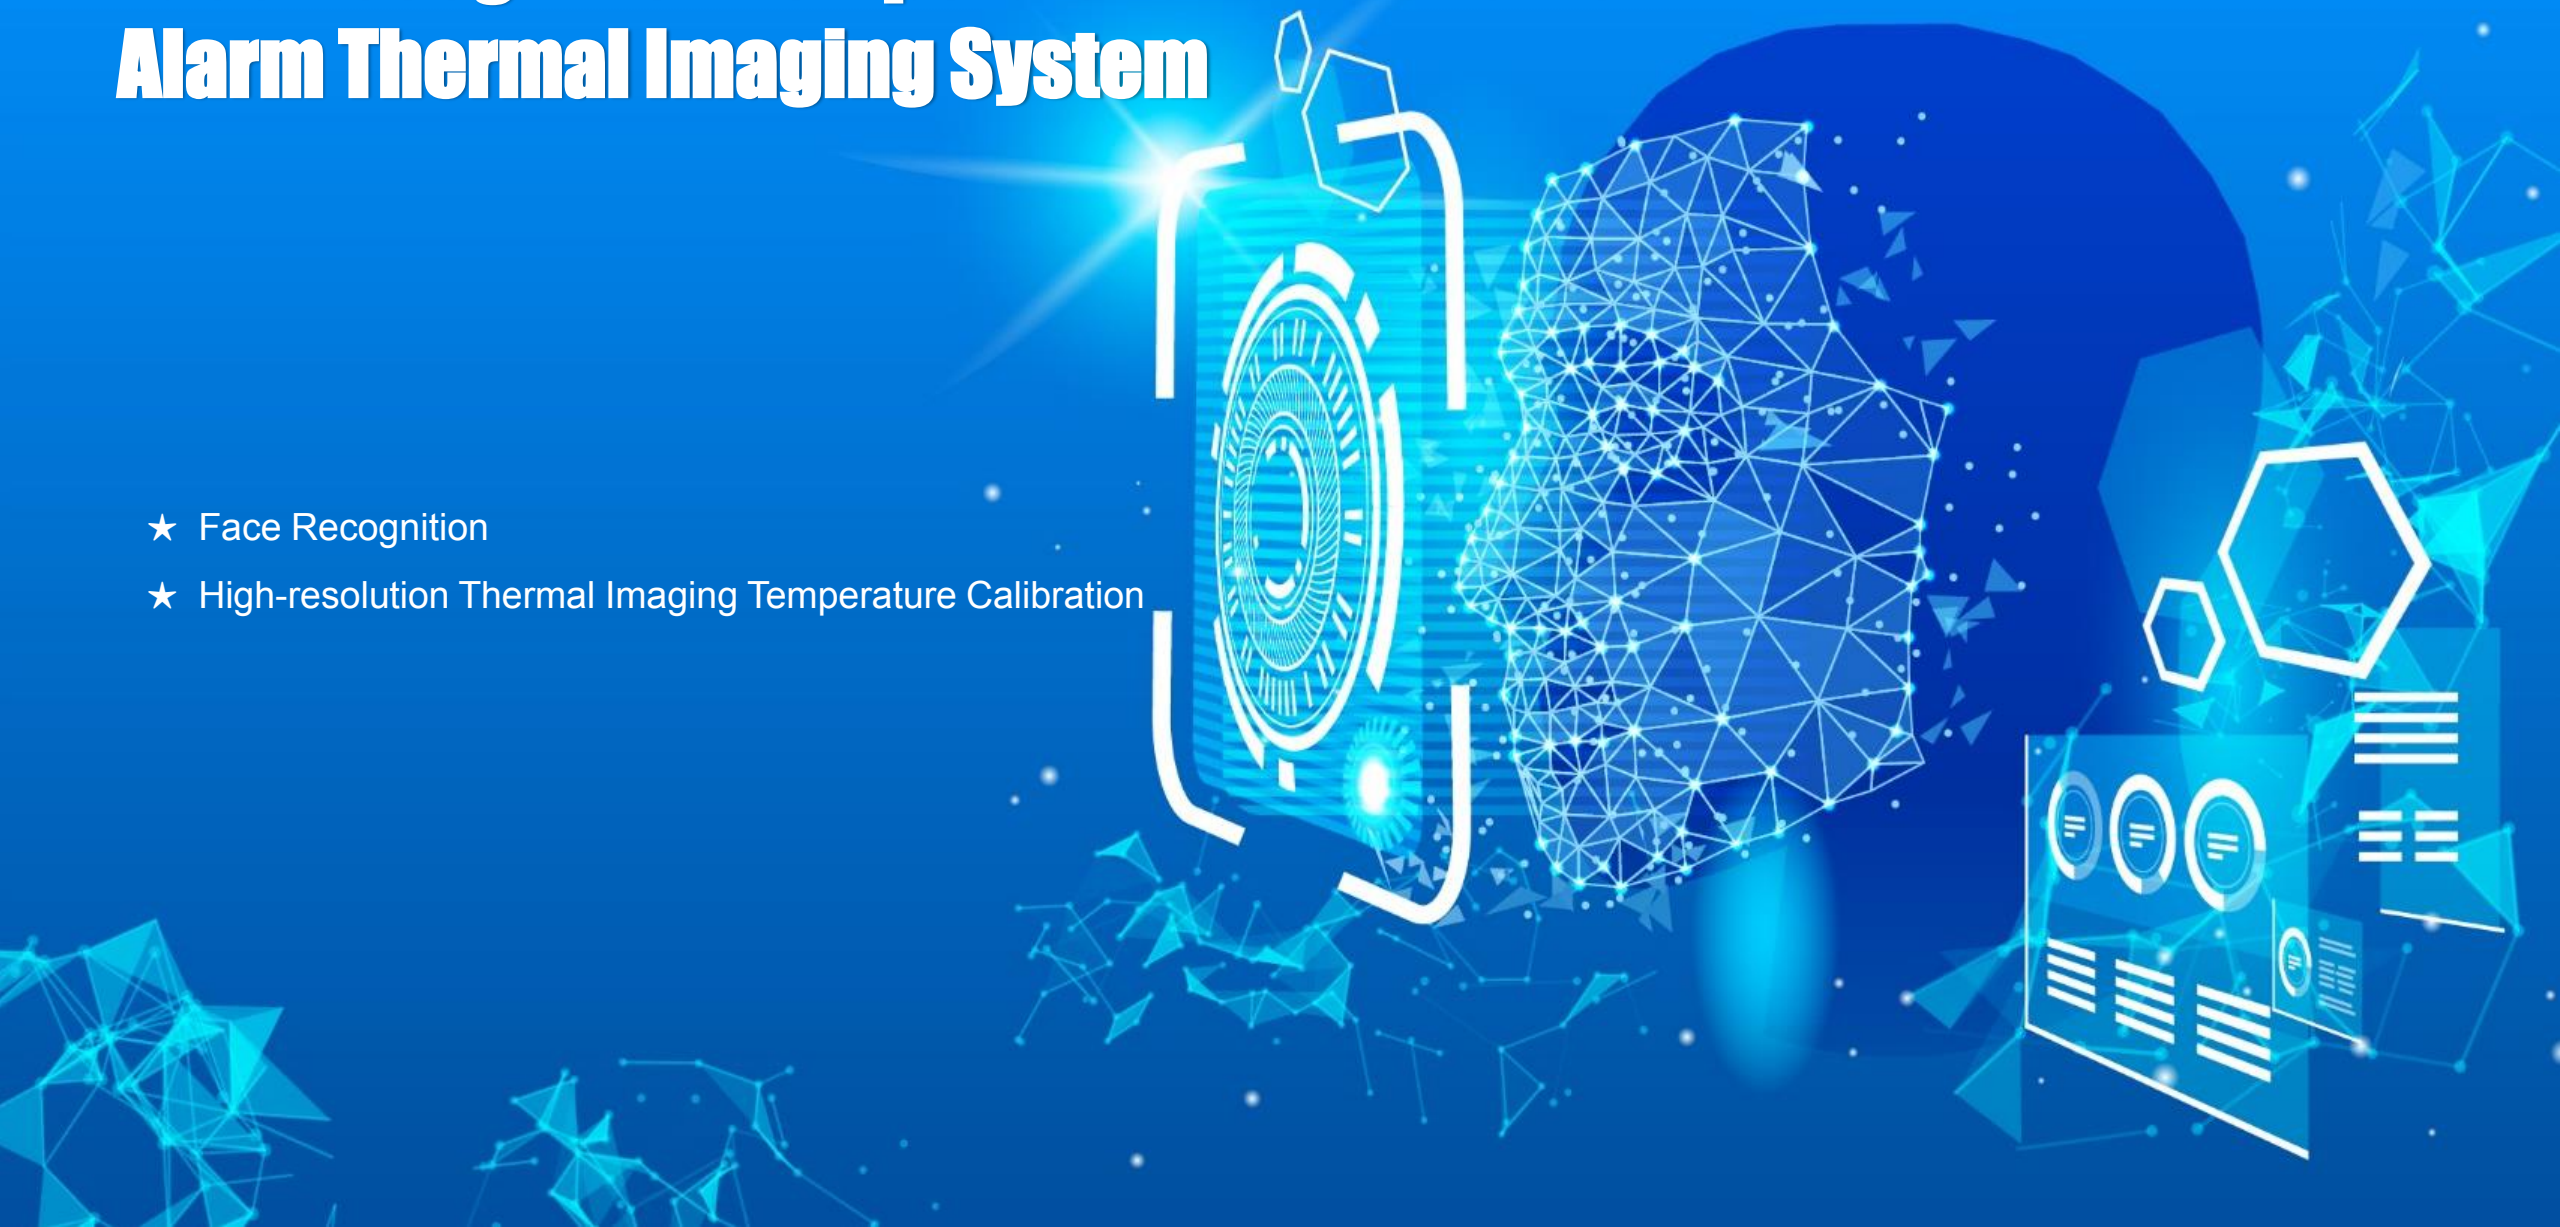

At present, the market is full of infrared single-point temperature measurement equipment, forehead measurement, wrist measurement, and other methods. Such temperature measurement methods cannot meet the import and output of data. Statistics and analysis of individual measured temperatures.



Our Product

Our Products

Multi-port Data Input and Output

10/100M, USB interface, serial port 232, Wiegand interface, reset interface, OTG interface, adaptive Ethernet RJ45 network port.

Platform Support

Face collection and comparison, support data analysis, statistics, classification, and query data functions for face comparison results and temperature monitoring.


Big Data Statistics and Traceability

Perform statistical analysis on the body temperature data of the personnel, trace the source of the body temperature data to the personnel with abnormal body temperature, and trace the nodes with abnormal body temperature.

Data Matching and Storage

Face recognition and temperature measurement results are automatically matched and stored.

Product Display

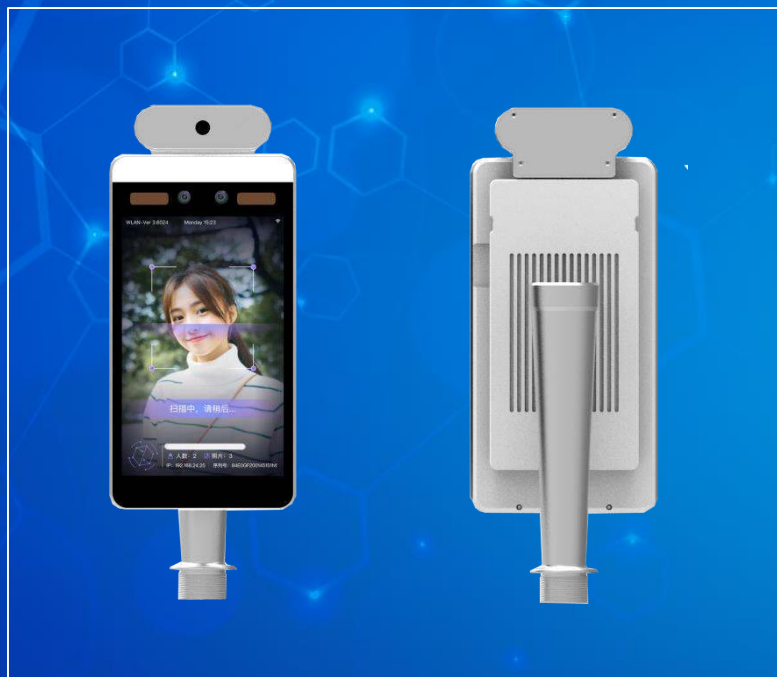

Facial Recognition Type

Model: ACS-FR-HG08B



Floor-standing Type

Model: ACS-FR-HG08B



Metal Detector+Face Type

Model: ACS-FR-HG09

Product Display

BEST SELLER

Camera Capture

ฟีเจอร์ใหม่!
เครื่องวัดอุณหภูมิ ACS-K3 + Camera Capture
แจ้งเตือน ผ่าน LINE Notify

เครื่องวัดอุณหภูมิ ACS-K3

LINE Notify DLS:
Temp: 36.00°C Normal
อุณหภูมิ: 36.00°C ปกติ

แจ้งเตือน: รูปผู้สแกน

แจ้งเตือนอุณหภูมิ: ผิดปกติ

1 Year WARRANTY

ACS-K3-PT:K3Camera+Line

เครื่องวัดอุณหภูมิอัตโนมัติ
ACS-K3

ตู้พ่นน้ำยาฆ่าเชื้อ
TEH-SP02

เครื่องจ่ายแอลกอฮอล์
ล้างมืออัตโนมัติ
ACS-K15

คัดกรองไว
ทำความสะอาดก่อนเข้าพื้นที่

ลด สัมผัส
ความเสี่ยง

ชุดทางเข้าจุดคัดกรองอัตโนมัติ
ตรวจวัดอุณหภูมิ + ฆ่าเชื้อ ไร้การสัมผัส

TEH-SP02-0806: ตู้พ่นน้ำยา

เครื่องวัดอุณหภูมิอัตโนมัติ
ACS-K3

ตู้พ่นน้ำยาฆ่าเชื้อ
TEH-SP01

เครื่องจ่ายแอลกอฮอล์
ล้างมืออัตโนมัติ
ACS-K15

คัดกรองไว
ทำความสะอาดก่อนเข้าพื้นที่

ลด สัมผัส
ความเสี่ยง

TEH-SP01-1215: ตู้พ่นน้ำยา

Product Display



ACS-KAB02: Body Temperature Detection Network Camera



ACS-SW02: No touch Switch for Elevator

Product Functions

• Infrared Temperature Measurement

100MS temp measurement (within 0.7 m),
 ± 0.3 °C temperature measurement accuracy,
suitable for indoor windless environment

• Face Recognition

100MS accurately recognizes human faces,
20,000 face libraries, can resist non-living
attacks such as mobile phones, computer
photos, videos, black and white, color
photos

• High Temperature Alarm


Real-time audible and visual alarm for abnormal
temperature, dual authorization for face +
temperature measurement, fast passage control

• Web Management

Upload the temperature identity information
in time, the temperature data can be
checked and traceable

• Multi-port Support

Support serial port, Wiegand 26, 34 output
input, output content support configuration

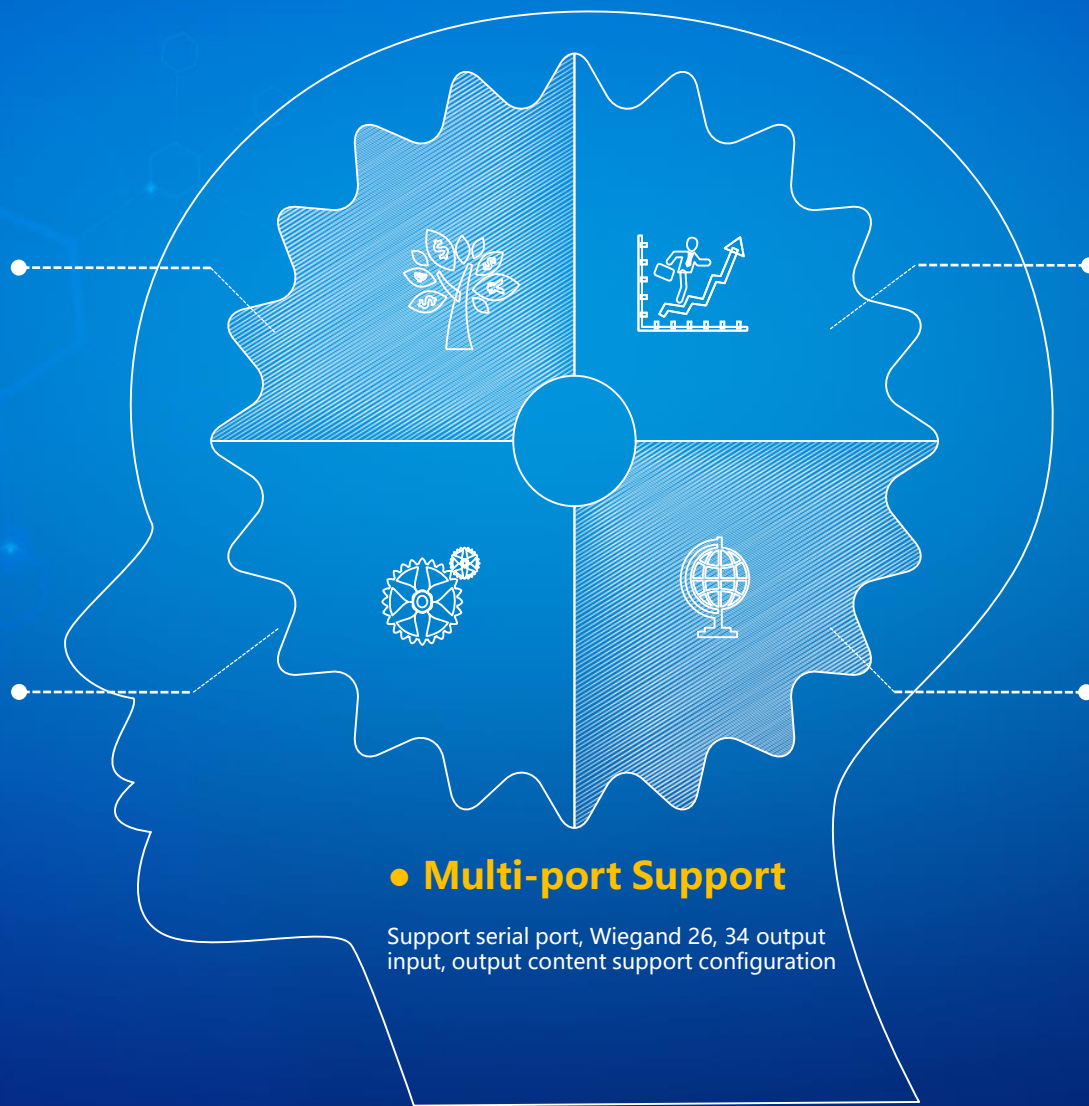


Software Algorithms-Despise

Fast Recognition Speed:

(A) Face tracking and detection takes about 20ms
(B) Face feature extraction takes about 200ms
(C) The time required for living face detection is 0.2ms;
Feature comparison takes 0.5ms
(10,000 face database, multiple recognition and average)

- * Support public network and local area network deployment methods;
- * Support HTTP, TCP interface connection

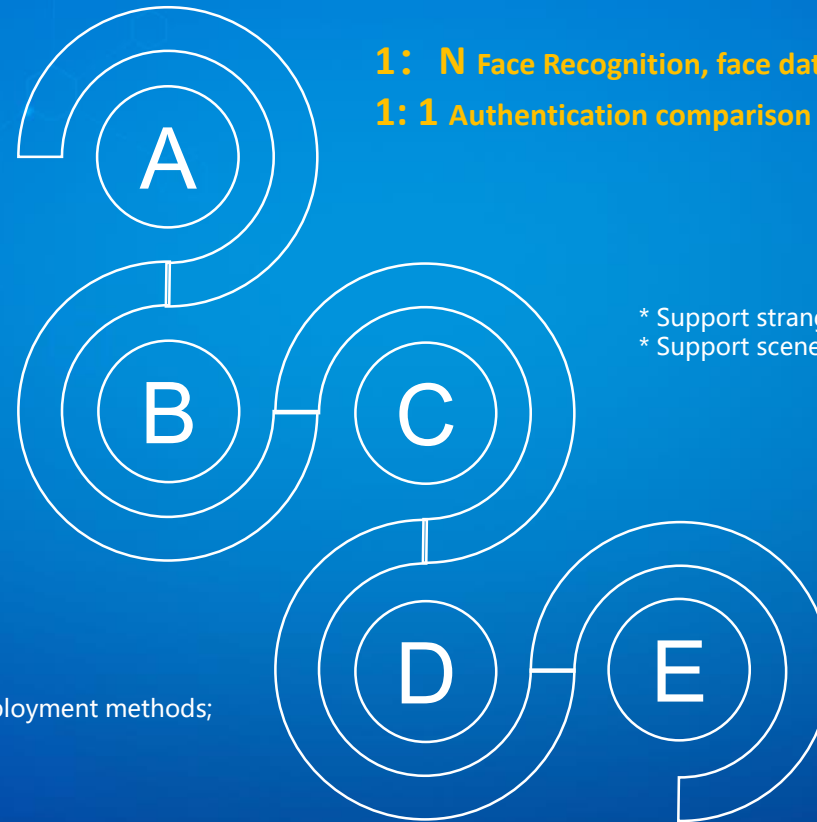




1: N Face Recognition, face database supports 2W faces, top1 hit rate is 99.99%

1: 1 Authentication comparison accuracy rate is more than 99%

- * Support stranger detection, stranger level configurable;
- * Support scenes during face recognition or stranger detection photo save

- * Support screen display content configuration;
- * Support identification distance configuration

Application

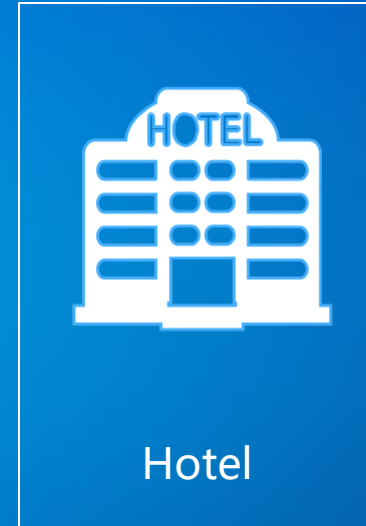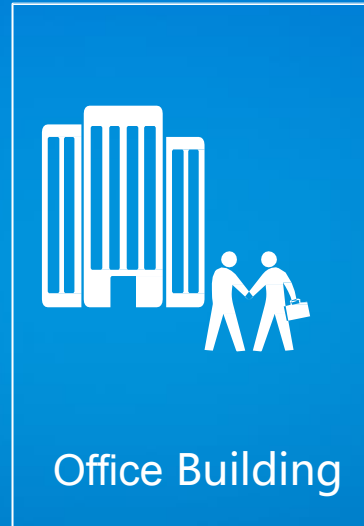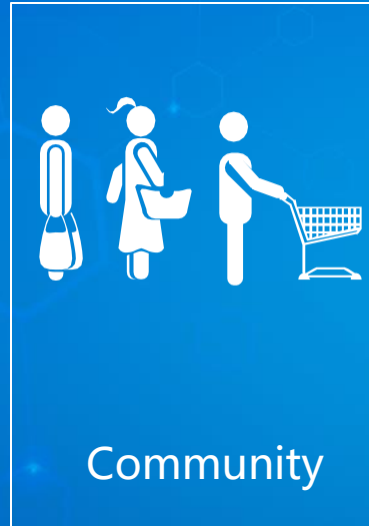

Widely used in various public places and various places where face access control is required

Product Superiority

Integrated the terminal equipment & non-contact disinfection device as a whole set, the overall appearance is elegant, high practicality; easy plug-and-play, which is very convenient and flexible for installation; reserved data interface location, convenient for data import and output.



Floor-standing Type

Improved the facial recognition temperature measure system more perfectly and systematically. Both hardware and software effectively integrated with security-check equipment.



Metal Detector+Face Type

Product Superiority




Pass Through Type



Pass+Metal Detector Type


Product Function

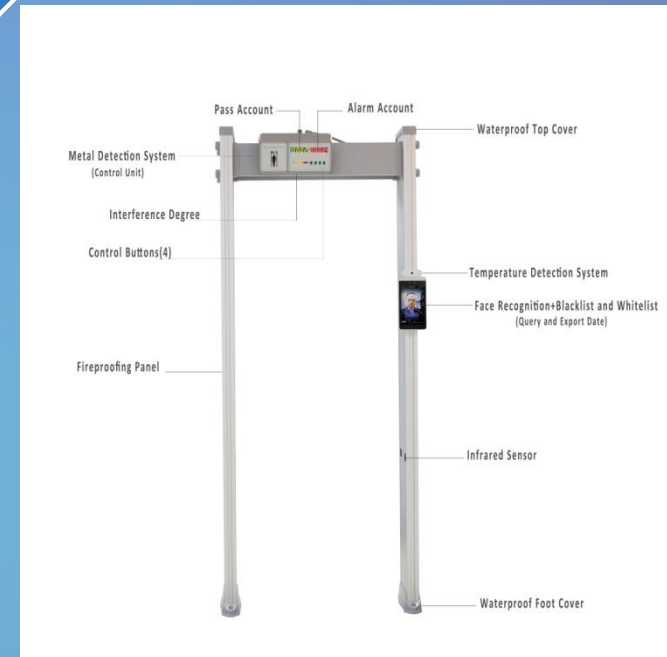

Product Size



Product Size

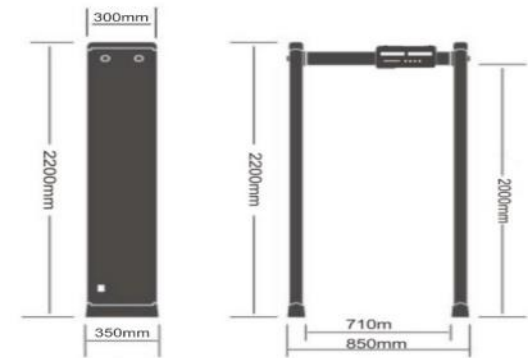

Packing Size



N.W./G.W. : 30KG/35KG
Size (Carton Box) : 2300*325*460mm/ctn
Volume: 0.34m³/ctn
Wooden box (optional)

