

FEATURES


- ✓ 7cm Thickened Panels have stronger stability and sturdiness
- ✓ 830mm Useful Passage Width to Ensure High Throughput
- ✓ Pinpointing of the Individual and Multiple Metal Targets
- ✓ Unmatched Anti-interference Performance
- ✓ Real-time Monitoring for Environmental Interface
- ✓ Full-module Design for Easy and Rapid Assembly
- ✓ Bi-directional Detection and Counter
- ✓ Password protection operated by authorized operators only
- ✓ Rich Practical Optional Features for your Selection
- ✓ No harm to human body with heart peacemaker, pregnant women, etc.



PARAMETERS

- 1) Sensitivity Level: 500 grades(adjustable)
- 2) Distinct Sensitivity Level: 1000 grades(adjustable)
- 3) Power Consumption: 30W
- 4) Security Detection Program: 60(built-in)
- 5) Pass through Rate: 0.4m/s~1.2m/s
- 6) Working Frequency Range: 1~99 bands
- 7) Vertical Channel Size: 2000 x 830 mm
- 8) Vertical Dimension: 2200(H) x 975(W) x 440(D)mm
- 9) Working Voltage: 100~240VAC, 50~60 Hz
- 10) Working Environment Temperature: -10°C~+45°C
- 11) Packing: 2300*330*770mm/ctn
- 12) N.W/G.W: 40KG/45KG
- 13) Plywood case is optional

- 33 Localization Zones with left, center and right indication

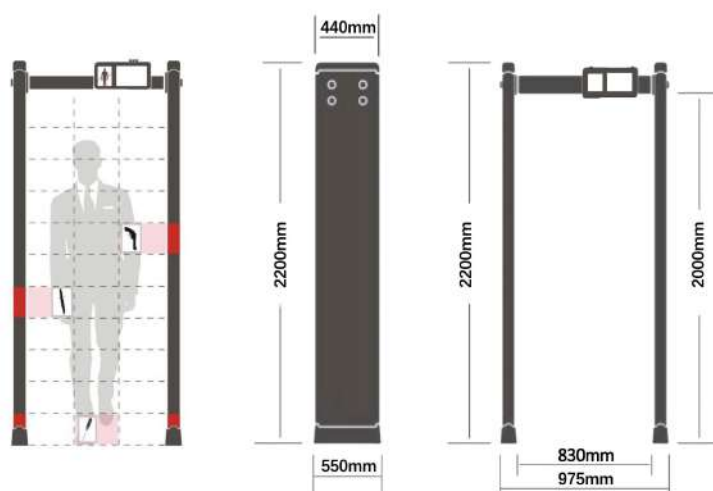

➤ Accurate Detection

- ▶ Has 33 horizontal zones with individually 1000 grades adjustable sensitivity.
- ▶ Capable of detecting a wide range of threat metal objects, even for a coin, when someone pass, the positions of the weapons on the person will be indicated by means of illuminated LEDs on both sides of panels. It can detect simultaneously more than three metals in different parts of body.

- **Superior Design & Construction**
 - ▶ Completely Modular for quick installation.
 - ▶ Overhead control unit with 7-inch LCD capacitive touch screen
 - ▶ The overall system is characterized by sturdy, reliable electronic and mechanical construction.
- **60 Built-in Security Detection Programs**
 - ▶ It is not easier to set the accurate security levels, users can choose directly from the known 60 embedded security standards by the use of a range of possible sensitivity settings.
- **Interface Suppression**
 - ▶ 99 adjustable working frequency to adjust to immunity the potential effects from x-ray device, radio and other electrical interface sources.
 - ▶ Allows several units to be placed in close proximity (50 cm) to one another.
- **Audible and Visual Alarms & Acoustic Alarm Signaling System**
 - ▶ Audible alarm and visual LED lights signal when a target has been detected.
 - ▶ Provide ability to randomly alarm on a selected range of 16 tones intensity levels.
The wide 10 volume control dynamic allows operation even in very noisy environment .
(also support silent mode)
- **Compliance**
 - ▶ Comply with CE, RoHS, FCC certificate, strictly follow the standard of EN60950, EN50081-1, GB15210-2003
 - ▶ ISO9001 Quality Management System

ACCESSORIES

➤ Removable Wheels

Removable wheels for easily portability, It is applicable to all detectors in today market.

Load-bearing: 150kg

Part#: SE-WT001



➤ Crossbar Battery Back-up

Crossbar battery back-up in stainless steel case. Support 6h, 12h, 24h of autonomous working time to choose.

Part#: SE-WT002



➤ PC Based Remote Control Software (wire) for metal detector part

RS-485, Ethernet interface, with USB converter for simple connection. Transit statistical data analysis via wire /wireless, managing data From multi detectors.

Part# SE-WT003



➤ Infrared Sensor for Temp. Measurement

It's a separate module with high precision for body temperature measurement. With sound and light signal of voice warning of normal/abnormal temperature and indicator to remind around people.

Part#: SE101-I



➤ Integrated Turnstile for Access Control

Integrated the turnstile into the detectors, when detector alarms, turnstile closes, no entry, otherwise, turnstile opens, allow access.

Part#: SE-WT005



➤ Multifunctional Camera

- Night Vision(color/black&white)
- 720P/1080FHD/1296P Resolution
- TF card storage
- 145 wide-angle lens
- Support multi-language

Part#: SE-WT007

