

## DH-HAC-HFW1200M-I2

### 2MP HDCVI IR Bullet Camera



### Features

- 1/2.7" 2Megapixel progressive CMOS
- Max 25/30fps@2M(1920×1080)
- DWDR, Day/Night(ICR), 2DNR,HLC,BLC
- 3.6mm fixed lens (6mm optional)
- Max. IR LEDs Length up to 50m, Smart IR
- Multi-formats 4 in 1
- IP67, DC12V


# DH-HAC-HFW1200M-I2

## Technical Specifications

|                        |                                                           |
|------------------------|-----------------------------------------------------------|
| <b>Model</b>           | <b>DH-HAC-HFW1200M-I2</b>                                 |
| <b>Camera</b>          |                                                           |
| Image Sensor           | 1/2.7" 2Megapixel CMOS                                    |
| Effective Pixels       | 1920(H)*1080(V)                                           |
| Frame Rate             | 25/30fps@1080P, 25/30/50/60fps@720P                       |
| Electronic Shutter     | PAL:1/25 ~1/10000; NTSC:1/30 ~1/10000                     |
| Min. Illumination      | 0.02Lux@F2.0,30IRE, 0Lux IR on                            |
| S/N Ratio              | >65dB                                                     |
| Video Output           | 1 channel BNC                                             |
| <b>Camera Features</b> |                                                           |
| OSD                    | English                                                   |
| Day/Night              | Auto(ICR) / Color / B/W                                   |
| Backlight Compensation | BLC / HLC / DWDR                                          |
| White Balance          | Auto / Manual                                             |
| Gain Control           | Auto / Manual                                             |
| Noise Reduction        | 2D                                                        |
| Privacy Masking        | Up to 4 areas                                             |
| Max. IR LEDs Length    | 50 m                                                      |
| Picture Adjustment     | Mirror / Brightness / Contrast / Sharpness / Smart IR     |
| <b>Lens</b>            |                                                           |
| Focal Length           | 3.6mm (6mm optional)                                      |
| Max Aperture           | F2.0                                                      |
| Focus Control          | Manual                                                    |
| Angle of View          | 3.6mm H:87° V: 46.4° D:103.8°<br>6mm H:53° V: 29.7° D:61° |
| Lens Type              | Fixed lens                                                |
| Mount Type             | Board-in Type                                             |
| <b>General</b>         |                                                           |
| Power Supply           | DC12V±25%                                                 |
| Power Consumption      | Max 5.28                                                  |
| Working Environment    | - 40℃ ~ + 60℃ (-40° F ~ +140° F)                          |
| Dimensions(W×D×H)      | Φ194mm× 96mm× 89mm                                        |
| Weight                 | 612g                                                      |

## DH-HAC-HFW1200M-I2

### Dimensions (mm)

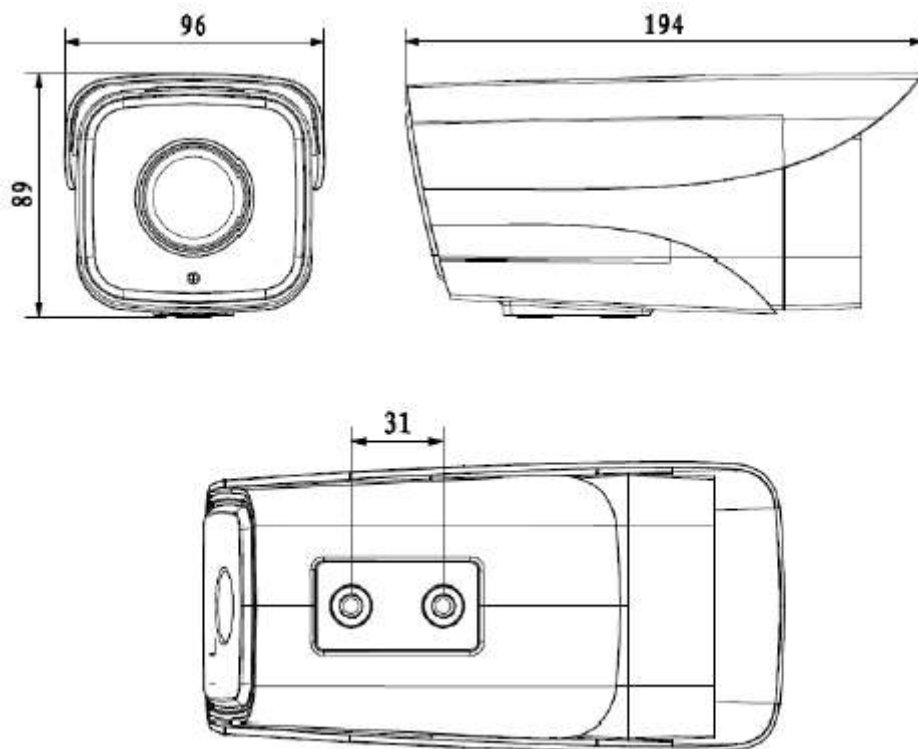

---

#### Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.