




barriers are normally held in a locked position, thus denying access to the secured side. Upon reader (RFID and/or fingerprint) positively recognizing a user's valid access card or fingerprint, its barriers swing automatically, thus allowing users passage to the secured side

Reliability

- SUS304 stainless steel case ensures long-lasting durability
- High quality electrical components Safety Features.
- All smooth finishing. No exposed screws.
- Ergonomic design makes card and fingerprint authentication fast & simple for users

Simplification

- Simplify structure and connection, easy to maintain.
- Control board with LCD screen, easy to operate.

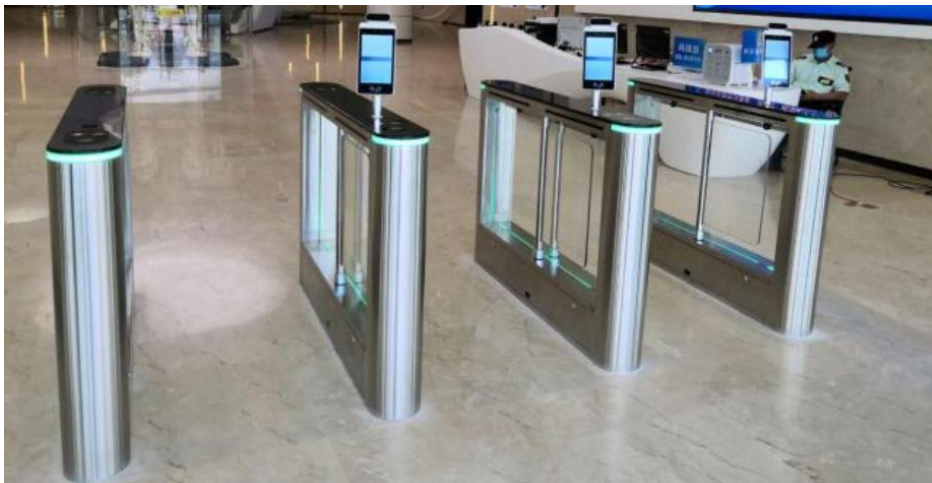

FLAP BARRIER

MODEL : TS-H8008

ข้อมูลด้านเทคนิค

| | |
|----------------------------|--|
| Cabinet material | SUS304 Stainless steel |
| Dimension (mm) | 1500 * 200 *1000 mm |
| Motor | Power full Servo motor drive unit |
| Power requirements | AC 100-120V/200-240V , 50/60Hz |
| Working environment | Indoor |
| Speed of throughput | Maximum 30/minute |
| Lane width (mm) | 650 |
| Interface | <ul style="list-style-type: none">- Dry contact (Relay)- +12V level signal- DC12V pulse with width of more than 100ms ,driving current > 10mA |
| Panel Material | Acrylic / Glass |
| Panel Size | Width 200- 450 mm (Customize) Height 450-1900 mm (Customize) |
| Indicator Display | LED |
| Gate Width | 500- 950 mm (Customize) |
| Emergency mode | Yes |
| Buzzer | Yes |
| Safety Sensor | 3 pairs |
| Security level | Medium |
| MCBF | 2 million |

การติดตั้ง

